

FIG. 1

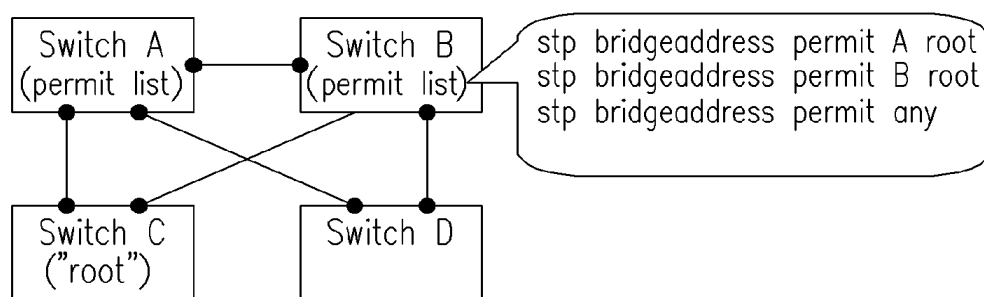


FIG. 2

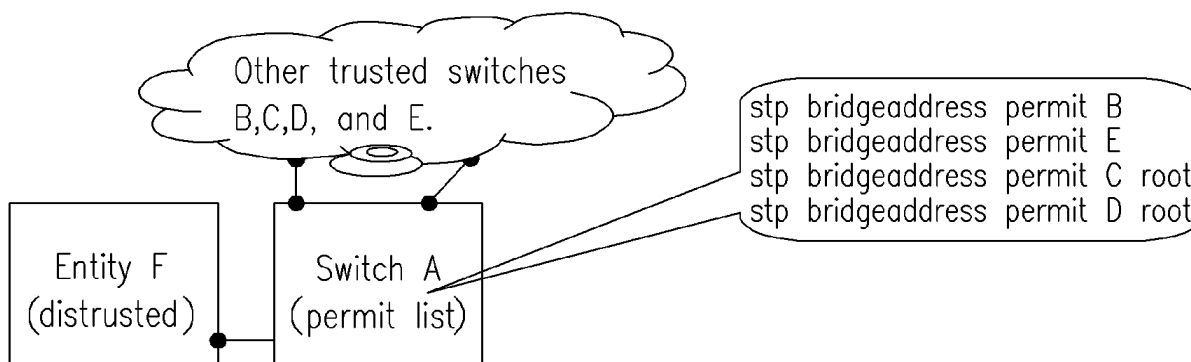


FIG. 3

Command	Description
<code>stp bridgeaddress {enable disable}</code>	Enables or disabled the bridge address permit list.
<code>[no]stp bridgeaddress permit {&lt;mac_address&gt;} [any[root]</code>	Configures bridge address in the permit list. When the keyword root is specified, the root identifier is also checked against the specified bridge address.

FIG. 4

Command	Description
<code>show bridgeaddress</code>	Displays the trusted port configurations and the current permit list.
<code>show bridgeaddress statistics</code>	Displays the information regarding denials by the permit list.
<code>clear bridgeaddress statistics</code>	Resets the statistics.

FIG. 5